MAIN MENU

FLOWCHART CONCEPT XL FILMS LTD.

DEFAULT VALUES ARE DISPLAYED IN BOXES

MANUALLY ENTER VALUE 1 to 300 FPS — 24 FPS

SPEED — 1 to 1/8000 SEC — 1/48 SEC

TIME — 0.125 to 1,000 MS — 20.833 MS

ANGLE — 4.0 to 360.0 DEG — 180.000 DEG

PRESET — SHADE FLASH CLOUDY FLOURESCENT DAYLIGHT TUNGSTEN INCANDECENT — Daylight

COLOR TEMP — MANUALLY ENTER VALUE 1,700 to 100,000 K — 5600K

TINT — -30 to +30 — 0

CALC WB — CALCULATES WHITE BALANCE

APPLY — APPLIES SETTINGS

* NOT IMPLEMENTED AT THIS TIME

FPS (VARISPEED) — ADVANCED / BASIC — 1 to 300 FPS — 24 FPS

ISO (SENSITIVITY) — 250 to 12800 ISO — IS 800

/F (F-STOP)* — NA — NA

1/SEC (EXPOSURE) — ADVANCED / BASIC — 1 to 1/8000 SEC — 1/48 SEC

WHITE BALANCE — ADVANCED / BASIC — 1,700 to 10,000 K — 5600K

RESOLUTION — 5K 2:1 5K 2.4:1 4K HD 5K FF 5K ANA 2K 2.4:1 — 5K 2:1

REDCODE (QUALITY) — 3:1 to 18:1 — 8:1

SECONDARY MENUS

PRESS MENU ICON (LCD) OR MENU BUTTON TO ACCESS

HDR

OFF — HDRx OFF

HDRx — HDRx ON

STOPS — 1 to 6 — 2

FOCUS

MODE — MANUAL CONFIRM — Manual

ZONE — CENTER SPOT MATRIX — Center

EXPOSURE

NOT IMPLEMENTED AT THIS TIME

PRESETS

PRESETS — USER DEFINED PRESETS — <Unspecified>

APPLY — APPLIES PRESET TO CAMERA

CREATE — NEW PRESET — <INPUT PRESET NAME> — SELECT VALUES: Image Project Output System Keys — CREATE

IMPORT/EXPORT

DELETE — DELETES DISPLAYED PRESET FROM CAMERA

CAMERA PRESETS — SELECT ON-CAMERA PRESET > EXPORT TO EXTERNAL MEDIA

DISK PRESETS — SELECT EXTERNAL MEDIA PRESET > IMPORT TO CAMERA

RMD PRESET — SELECT RMD FROM EXTERNAL MEDIA AND SELECT APPLY

MEDIA

SELECT MEDIA — SELECT DESIRED MEDIA LOCATION — S-SSD

SET MEDIA — SET CURRENT MEDIA PROPERTIES — Reel No/Cam ID/Cam Pos

FORMAT MEDIA — FORMAT CURRENT MEDIA — Reel No/Cam ID/Cam Pos

EJECT MEDIA — EJECT CURRENT MEDIA

SETTTINGS

DISPLAY

LOOK

SENSOR

PROJECT

GO TO SHEET 2 OF 4

MODES

AUDIO/VIDEO

SETUP

MAINTENANCE

GO TO SHEET 3 OF 4

GO TO SHEET 4 OF 4

POWER

SHUTDOWN — POWERS DOWN CAMERA

RED EPIC®

TITLE: MENU MAP

VERSION: 1.6.20 BETA

©2011 RED.COM, INC.

SHEET 1 OF 4

REV A

SECONDARY MENUS

PRESS MENU ICON (LCD) OR MENU BUTTON TO ACCESS

FLOWCHART CONCEPT XL FILMS LTD.

DEFAULT VALUES ARE DISPLAYED IN BOXES

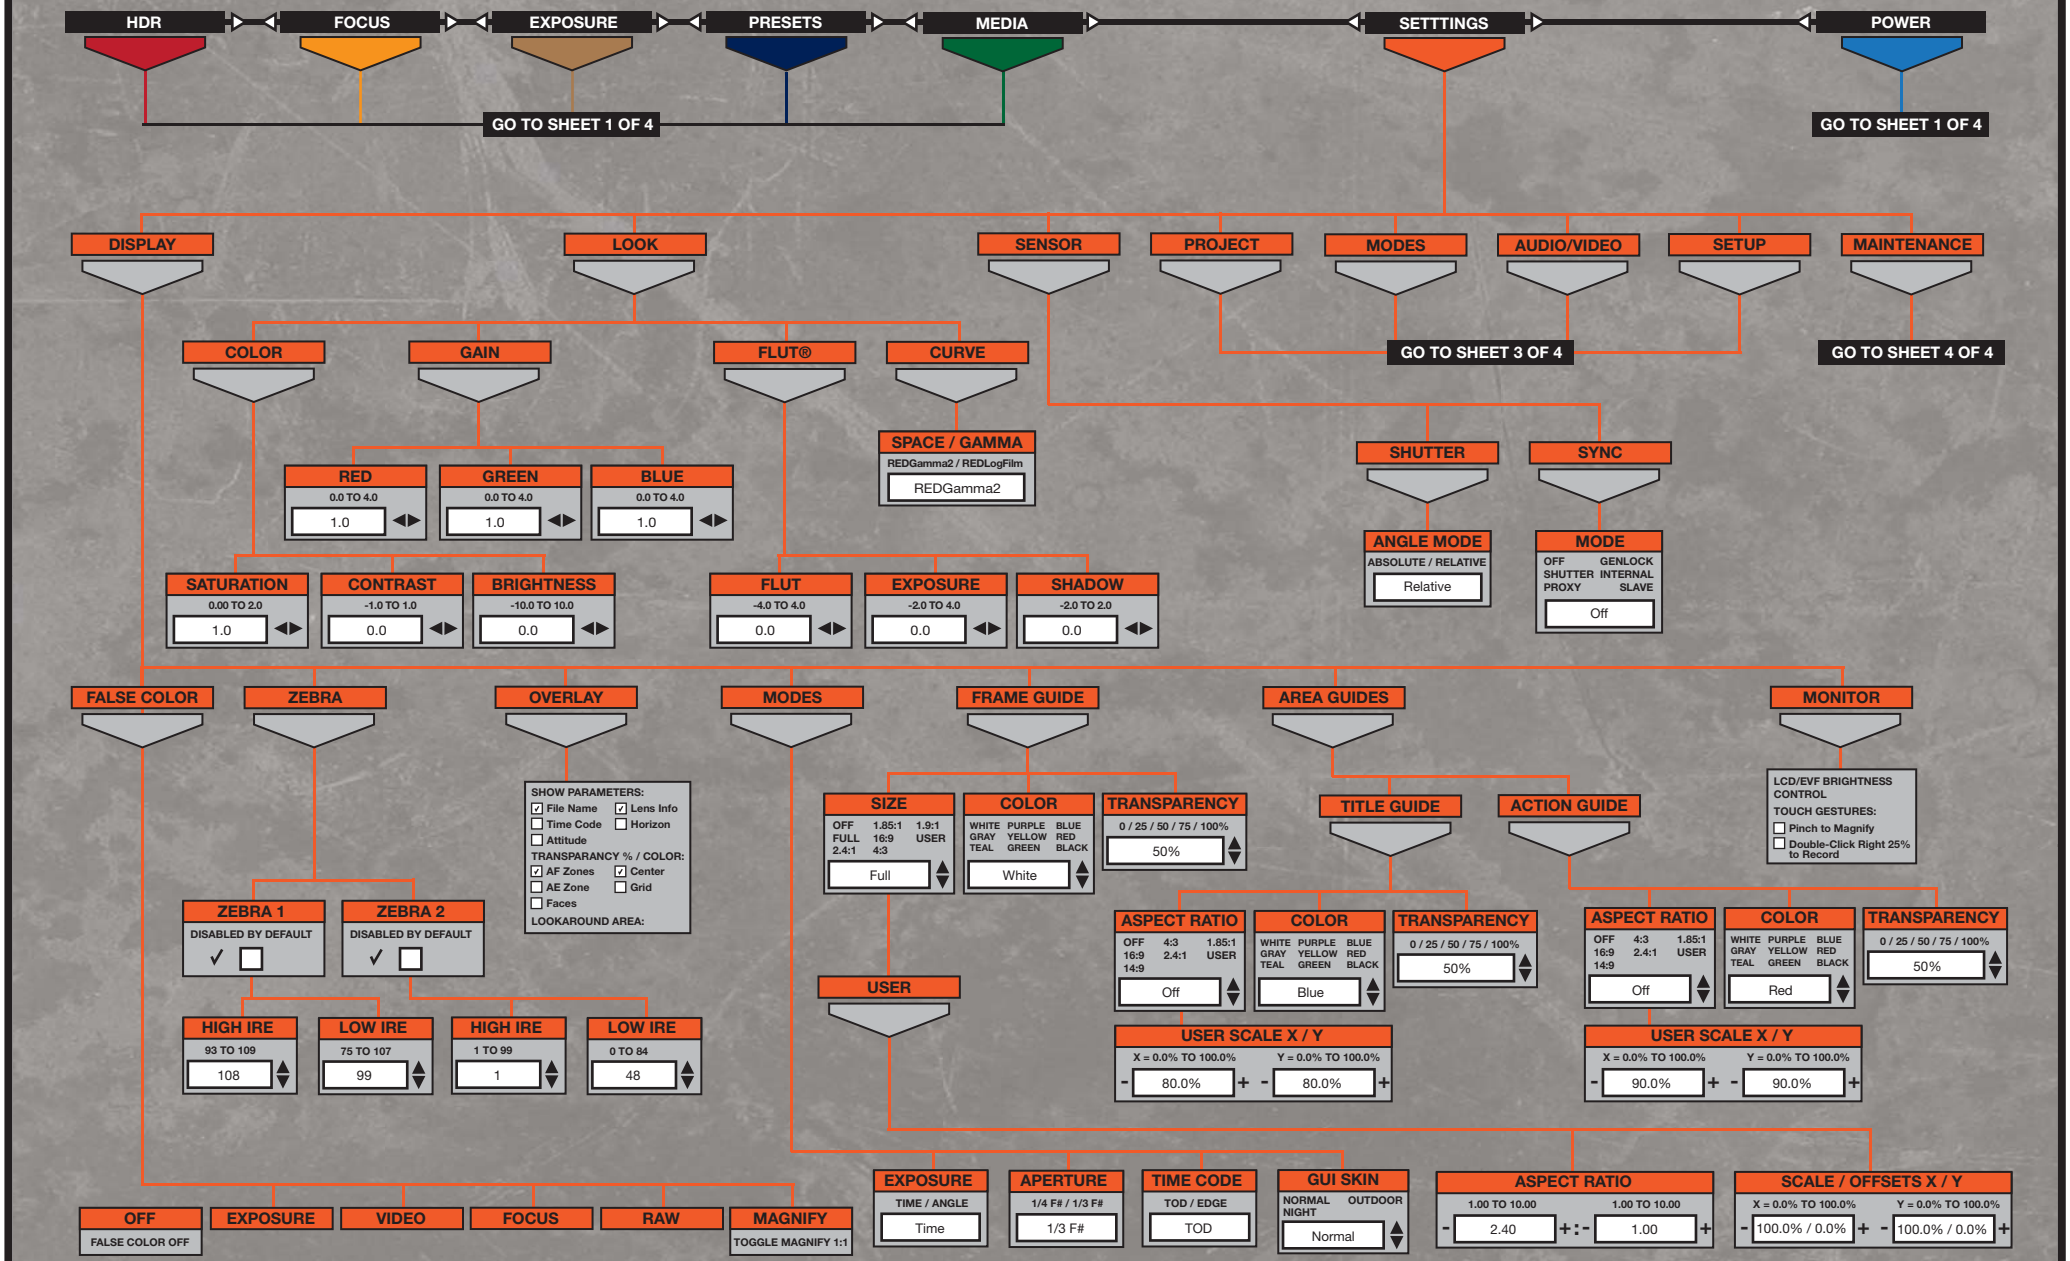

RED EPIC®

TITLE: MENU MAP

VERSION: 1.6.20 BETA

©2011 RED.COM, INC.

SHEET 2 OF 4

REV A

SECONDARY MENUS

PRESS MENU ICON ( ) (LCD) OR MENU BUTTON TO ACCESS

FLOWCHART CONCEPT XL FILMS LTD.

DEFAULT VALUES ARE DISPLAYED IN BOXES

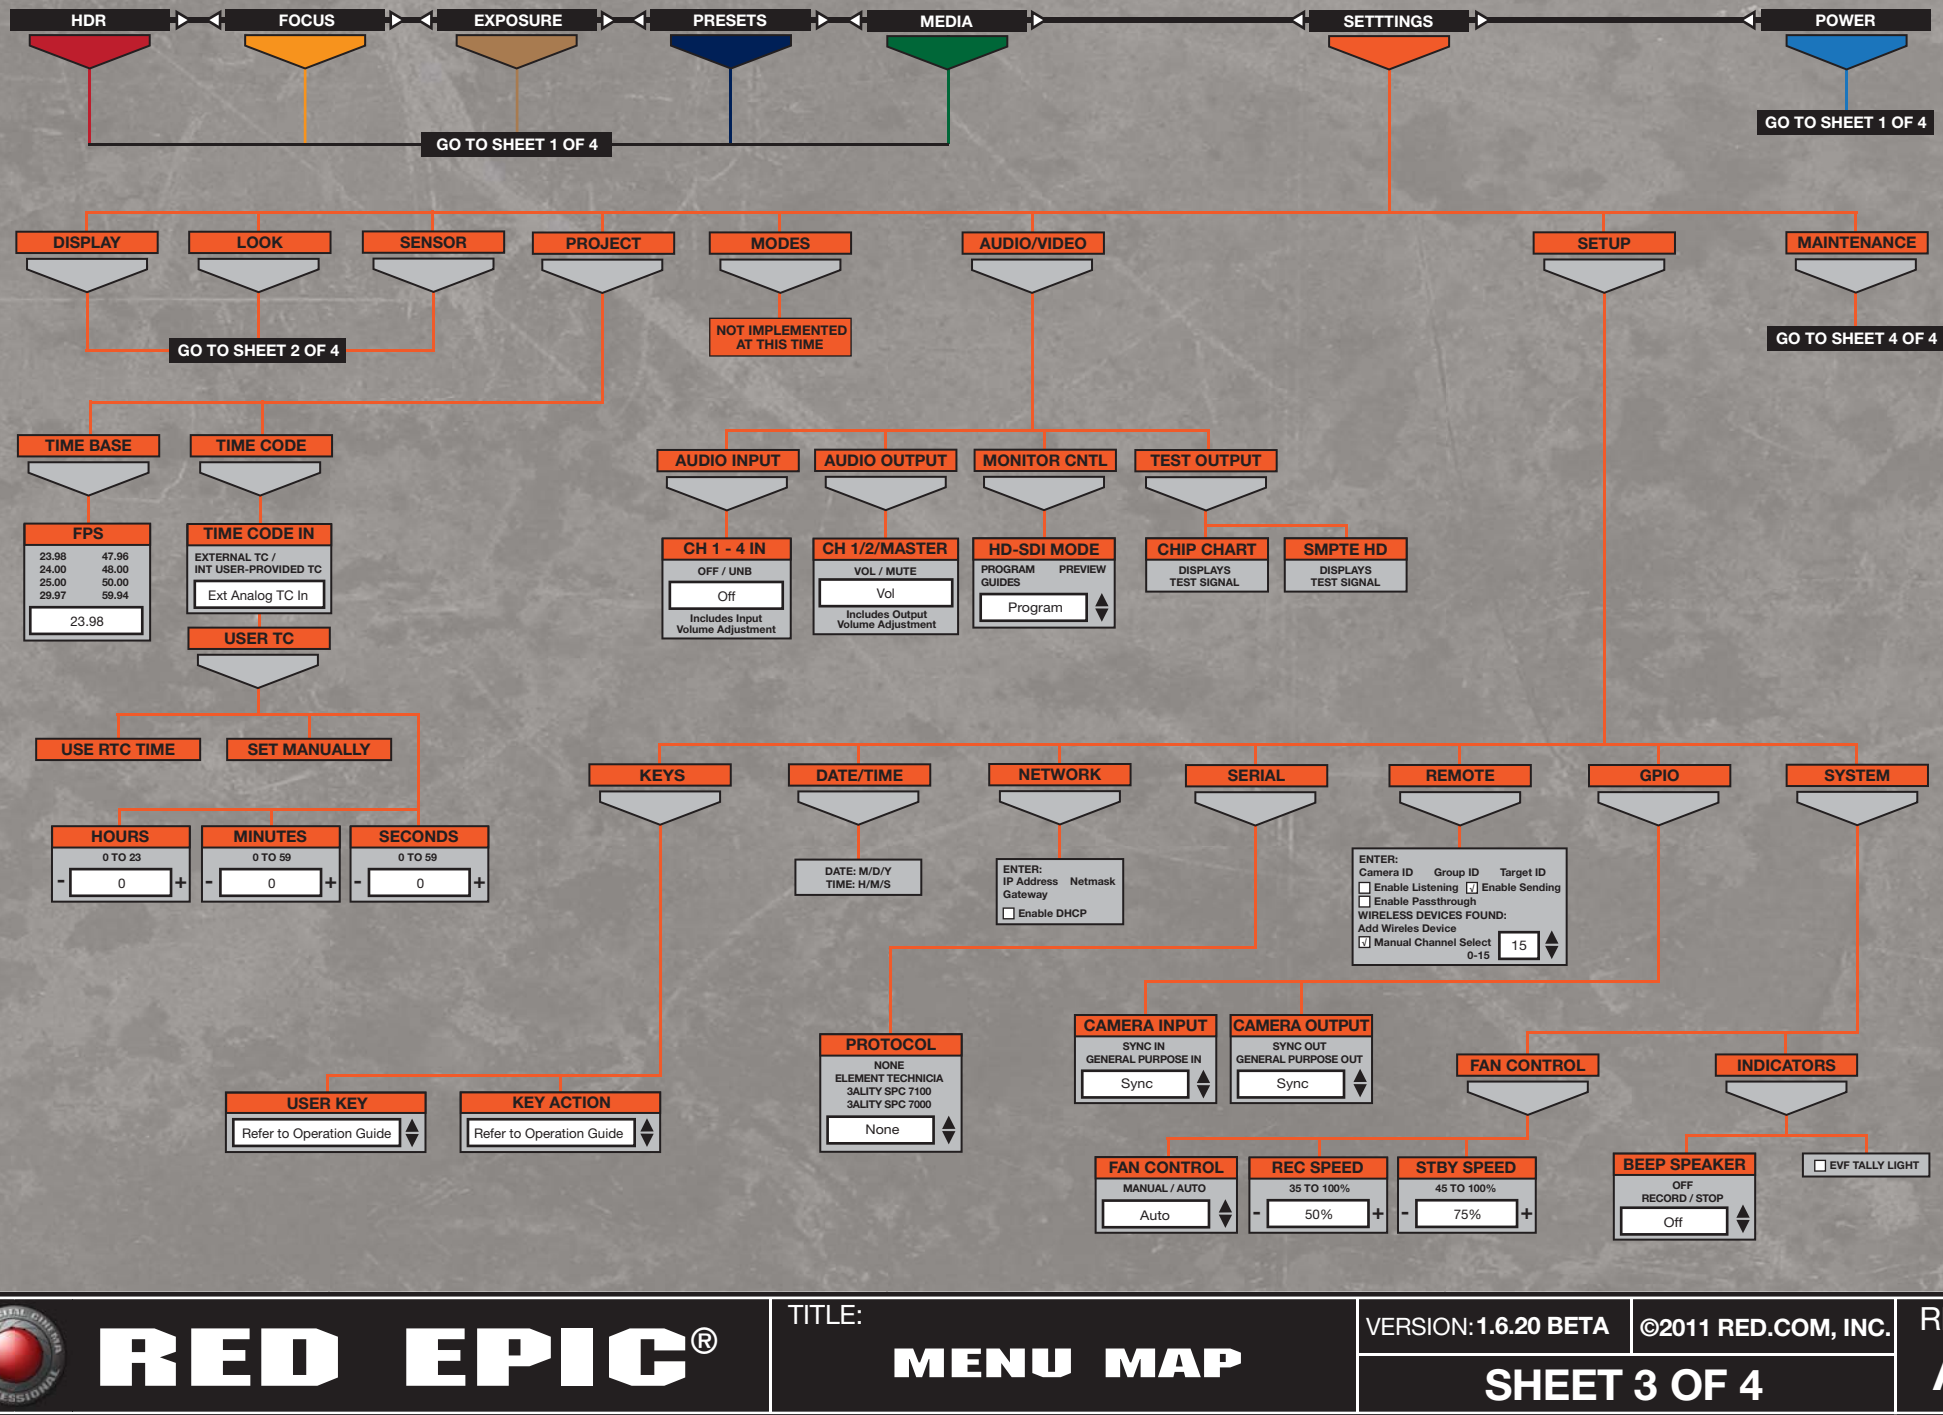

RED EPIC®

TITLE: MENU MAP

VERSION: 1.6.20 BETA

©2011 RED.COM, INC.

SHEET 3 OF 4

REV A

SECONDARY MENUS

PRESS MENU ICON (LCD) OR MENU BUTTON TO ACCESS

FLOWCHART CONCEPT XL FILMS LTD.

DEFAULT VALUES ARE DISPLAYED IN BOXES

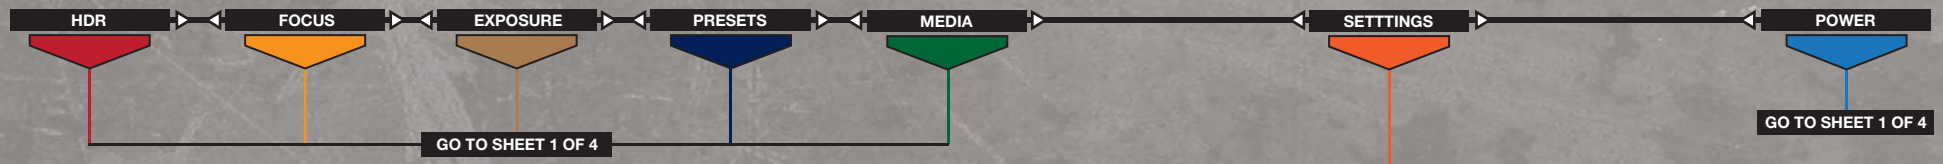

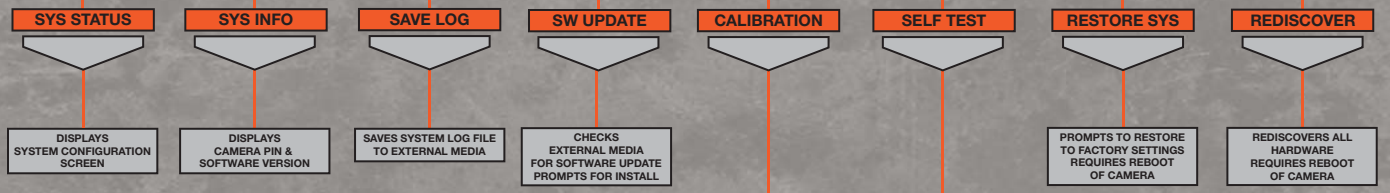
SYS STATUS
SYS INFO
SAVE LOG
SW UPDATE
CALIBRATION
SELF TEST
RESTORE SYS
REDISCOVER
DISPLAYS SYSTEM CONFIGURATION SCREEN
DISPLAYS CAMERA PIN & SOFTWARE VERSION
SAVES SYSTEM LOG FILE TO EXTERNAL MEDIA
CHECKS EXTERNAL MEDIA FOR SOFTWARE UPDATE PROMPTS FOR INSTALL
PROMPTS TO RESTORE TO FACTORY SETTINGS REQUIRES REBOOT OF CAMERA
REDISCOVERS ALL HARDWARE REQUIRES REBOOT OF CAMERA

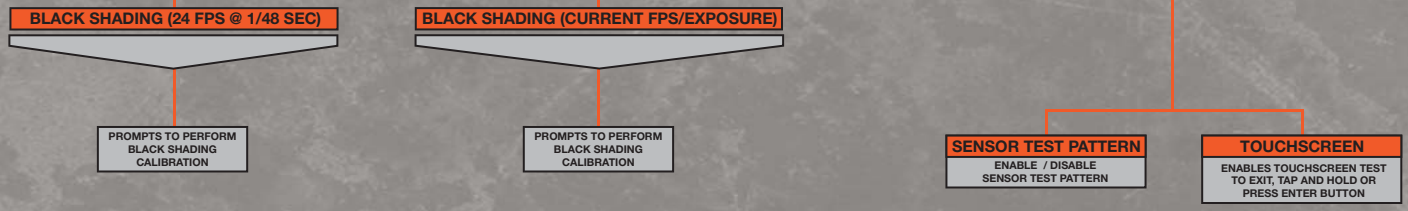
BLACK SHADING (24 FPS @ 1/48 SEC)
BLACK SHADING (CURRENT FPS/EXPOSURE)
PROMPTS TO PERFORM BLACK SHADING CALIBRATION
PROMPTS TO PERFORM BLACK SHADING CALIBRATION
SENSOR TEST PATTERN
ENABLE / DISABLE SENSOR TEST PATTERN
TOUCHSCREEN
ENABLES TOUCHSCREEN TEST TO EXIT, TAP AND HOLD OR PRESS ENTER BUTTON

RED EPIC®

TITLE: MENU MAP

VERSION: 1.6.20 BETA

©2011 RED.COM, INC.

SHEET 4 OF 4

REV A